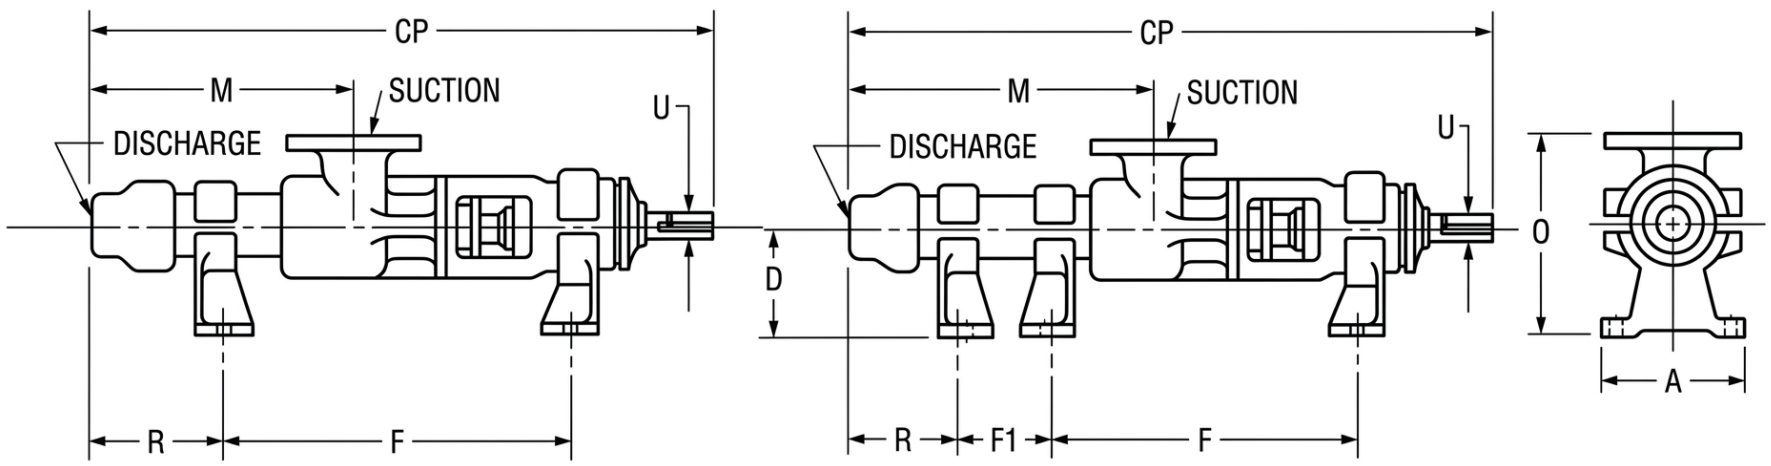

DIMENSIONAL REFERENCE DRAWING

Drawing is diagrammatic - use table values below.

Additional sheet dimensions: AA = minimum clearance required to disassemble pump | E = mounting-foot half-width | H = mounting-hole diameter
All dimensions are in inches. Suction and discharge values are nominal connection sizes. Weight is in pounds.

AA	CP	A	D	E	F	F1	H	M	O	R	U	Keyway	Suction	Discharge	Weight
14.25	60.62	8.62	6.25	3.50	20.00	18.00	0.69	39.31	11.25	14.06	1.12	.37 x .19	3.00	2.50	192

3L6 INSTALLATION REFERENCE

- Overall centerline length (CP): 60.62 in
- Suction connection: 3.00 in
- Drive-shaft keyway: .37 x .19 in
- Minimum disassembly clearance (AA): 14.25 in
- Discharge connection: 2.50 in
- Approximate pump weight: 192 lb

Source basis: supplied L & J Frame Dimension Sheet, dated February 15, 1996. Values reproduced for model-specific installation reference.

Compatibility references are used solely to identify fitment. Moyno is a trademark of its respective owner; ACCA Pumps is an independent manufacturer and supplier.