# Aftermarket Parts for Supported NE200 Pumps

Use this reference to identify the pump arrangement and drawing positions before requesting ACCA replacement components.

### MODEL IDENTIFICATION

## Example: 2NE200A

2 = stages | NE = family | 200 = size | A = construction suffix

### SUPPORTED STAGE CONFIGURATIONS

## 1, 2, 4

### FULL CROSS-SECTION

Pump, housing and bearing references

### PIN JOINT

Pins, sleeves, rings and seals

### GEAR JOINT

Complete joint and service references

### PACKING GLAND

Packing, follower and flush parts

**Send the complete model, nameplate photo, joint photos, required component and operating conditions.**

ACCA does not cross-reference commission numbers. Selection is based on verified pump construction and dimensions.

# NE Pump Cross-Section and Position Table

Position numbers identify drawing locations, not OEM ordering numbers. Confirm construction variants against the pump-specific bill of materials.

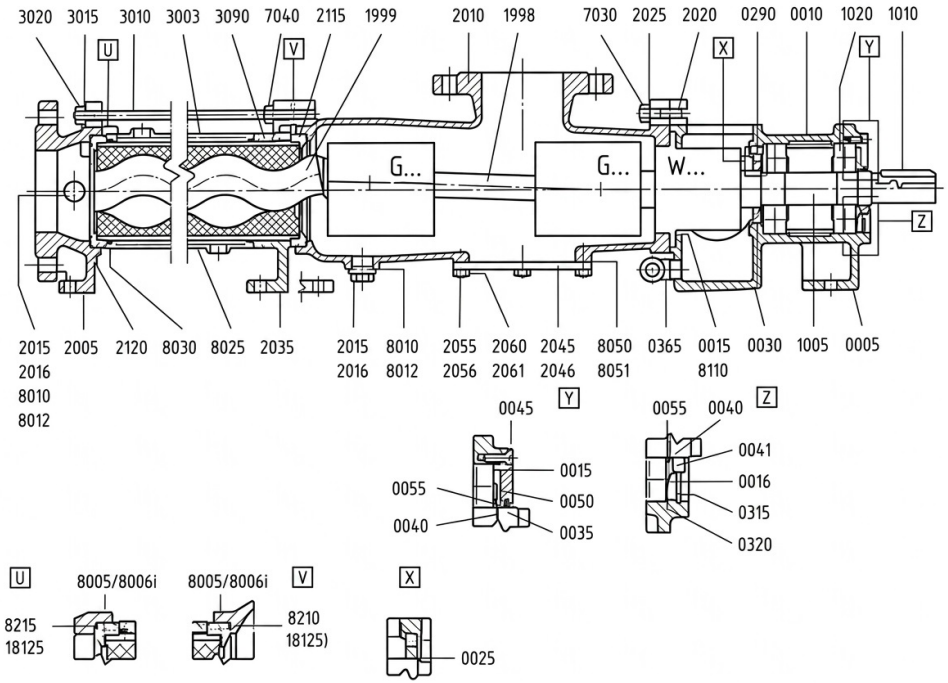


## PARTS POSITION REFERENCE

| POS | DESCRIPTION |
|---|---|
| 0005 | Bearing housing |
| 0010 | Distance sleeve |
| 0015/0016 | Bearing cover - construction variant |
| 0025 | Bearing retainer - verify construction |
| 0030 | Radial shaft seal |
| 0035 | Snap ring |
| 0040/0041 | Radial shaft seal - construction variant |
| 0045 | Cylindrical head screw |
| 0050 | Grease retaining ring |
| 0055 | Support disc / spacer |
| 0290 | Shaft sealing unit |
| 0315/0320 | Retaining-ring construction variant |
| 0365 | Drain / vent connection |
| 1005 | Drive shaft |
| 1010 | Key |

| POS | DESCRIPTION |
|---|---|
| 1020 | Bearing |
| 1998 | Connecting rod |
| 1999 | Rotor |
| 2005 | Discharge housing |
| 2010 | Suction / pump housing |
| 2015/2016 | Screw plug - construction variant |
| 2020 | Hex screw |
| 2025 | Washer |
| 2035 | Support foot |
| 2045/2046 | Housing fastener - variant |
| 2055/2056 | Housing fastener - variant |
| 2060/2061 | Housing fastener - variant |
| 2115 | Connecting-rod guard / sleeve |
| 2120 | Housing gasket / seal |
| 3003 | Stator sleeve / jacket |

| POS | DESCRIPTION |
|---|---|
| 3010 | Through-bolt |
| 3015 | Washer |
| 3020 | Hex nut |
| 3090 | Stator clamping component |
| 7030 | Gland bolt / stud |
| 7040 | Packing ring |
| 8010/8012 | Sealing ring - variant |
| 8025 | O-ring |
| 8030 | O-ring for jacketed stator |
| 8050/8051 | Joint O-ring - variant |
| 8110 | Gasket / sealing ring |
| 8210/8215 | Mechanical-seal component - variant |
| 8005/8006i | Flat gasket / O-ring variant |
| 18125 | Mechanical-seal component - verify |

# NE Pin Joint Parts

Position numbers identify drawing locations, not OEM ordering numbers. Confirm construction variants against the pump-specific bill of materials.

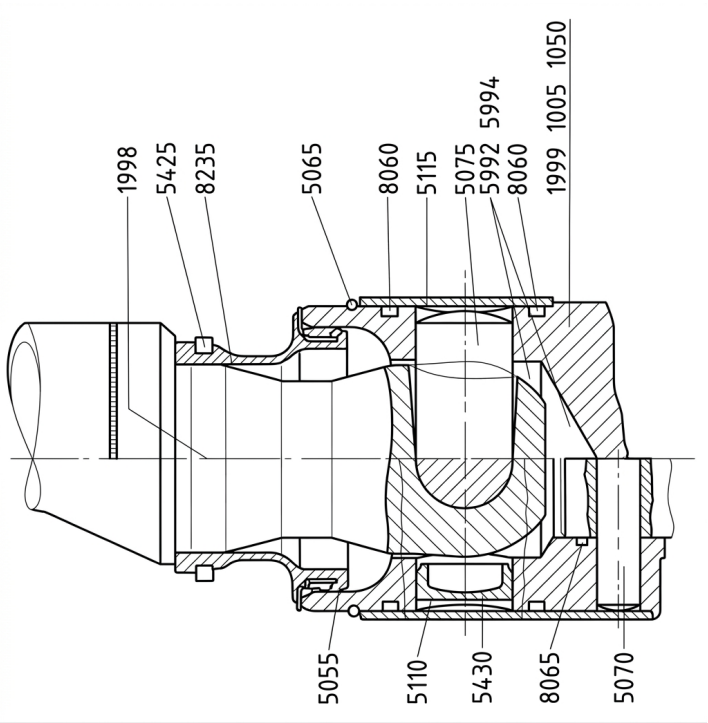


## PARTS POSITION REFERENCE

| POS | DESCRIPTION |
|---|---|
| **1998** | Connecting rod |
| **5425** | Clamp ring |
| **8235** | SM pin-joint seal |
| **5065** | Snap ring |
| **8060** | O-ring |
| **5115** | Sleeve |
| **5075** | Pin |

| POS | DESCRIPTION |
|---|---|
| **5992/5994** | Joint-head construction variant |
| **1005/1050** | Drive shaft / connecting shaft |
| **1999** | Rotor |
| **5055** | Joint-head component - verify |
| **5110** | Support ring |
| **5430** | Retaining ring |
| **5070** | Pin-joint component - verify |

# NE Single-Sealed Gear Joint Parts

Position numbers identify drawing locations, not OEM ordering numbers. Confirm construction variants against the pump-specific bill of materials.

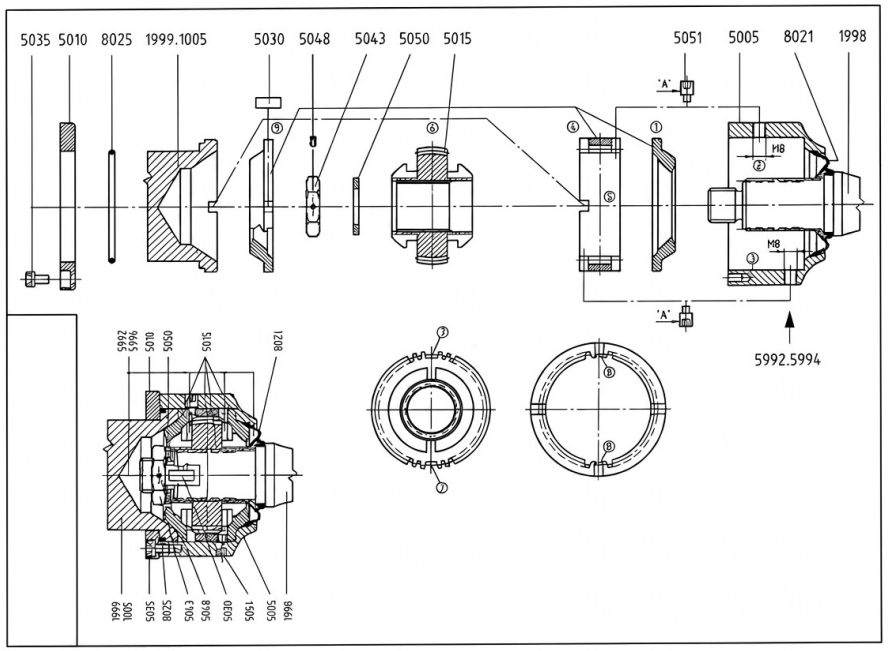


## PARTS POSITION REFERENCE

| POS | DESCRIPTION |
|---|---|
| **5035** | Cylindrical head screw |
| **5010** | Gear-joint retaining component |
| **8025** | O-ring |
| **1999/1005** | Rotor / drive-shaft end |
| **5030** | Key |
| **5048** | Set screw |
| **5043** | Hex nut |

| POS | DESCRIPTION |
|---|---|
| **5050** | Washer |
| **5015** | Complete gear joint |
| **5051** | Drain plug |
| **5005** | Joint shell |
| **8021** | SM seal |
| **1998** | Connecting rod |
| **5992/5994** | Gear-joint construction variant |

# NE Packing Gland and Seal Housing Parts

Position numbers identify drawing locations, not OEM ordering numbers. Confirm construction variants against the pump-specific bill of materials.

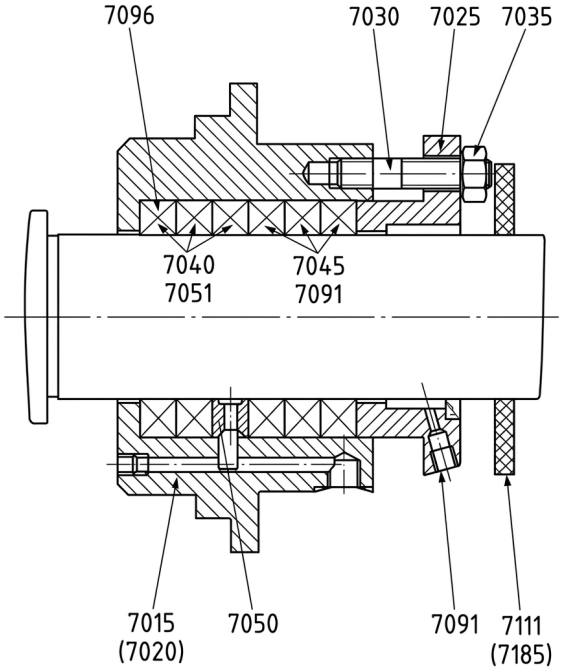


## PARTS POSITION REFERENCE

| POS | DESCRIPTION |
|---|---|
| **7015/7020** | Stuffing-box housing - variant |
| **7025** | Gland follower |
| **7030** | Gland bolt / stud |
| **7035** | Hex nut |
| **7040** | Packing rings |
| **7045** | Packing spacer ring |

| POS | DESCRIPTION |
|---|---|
| **7050** | Throttle / support ring |
| **7051** | Lantern ring |
| **7091** | Flush / lubrication connection |
| **7096** | Stuffing-box bushing |
| **7111/7185** | Thrower - construction variant |

# NE200 Bonded Stator Reference

Verify the existing stator, end construction, elastomer, geometry and operating conditions.

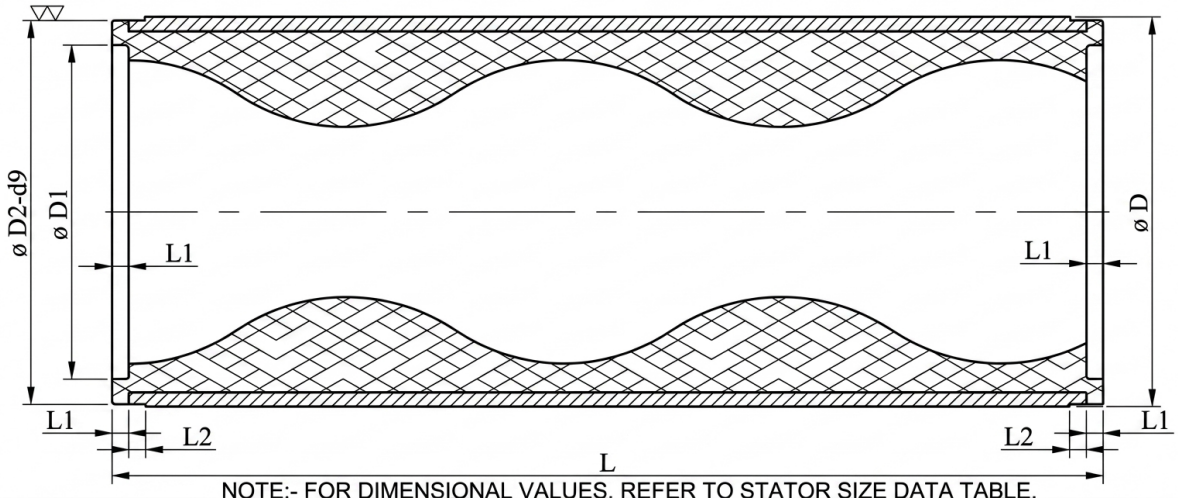


Reference illustration only. Internal cavity geometry is schematic and not a manufacturing-certified profile.

## DIMENSIONAL VALUES REQUIRE CONFIRMATION

The retained stator sheet does not provide verified dimensions for this size. Send measured dimensions and pump identification.

No dimensional values were inferred from unrelated models or clearance tables.

## REQUEST PART IDENTIFICATION

Send model, stage count, suffix, joint arrangement, photos, dimensions and operating conditions.

**281-576-7722 | info@accapumps.com | accapumps.com/netzsch/netzsch-ne/**

NETZSCH® and NEMO® are registered trademarks of their respective owner. ACCA Pumps is independent and is not affiliated with or endorsed by the trademark owner.